

# Bollards



200mm Square Bollard in Oak, pointed and rebated, with yellow reflective strip



125mm Square Bollard in Balau, chamfered and rebated, with white reflective strip



125mm Square Bollard in Purpleheart, domed and rebated, with red reflective panel


Most landscape schemes use bollards to keep spaces open and accessible to pedestrians, whilst providing effective traffic control. We manufacture wooden bollards with either flat, chamfered, pointed or domed tops in a range of sizes, which would normally suit rural environments, such as cycle paths and walkways. Chamfered and pointed (four way weathered) tops are cut to an angle of 42°. The rebate offered as standard is 30mm wide for the 100 and 125 widths, and 50mm wide for the 150, 175 and 200 widths, though any width of rebate is possible. The smaller sizes can also be cost effectively used as way markers.

Reflective material to B.S. 873 class 1, in either strips in the rebate around the bollard top, or flush fitting in panels further

down, can be attached to increase visibility.

It is supplied in white or red as standard, but other colours are available. The reflective panels are 63 x 152mm in the 100 and 125 widths, and 100 x 150mm for the 150, 175 and 200 widths, and are glued and screwed in position.

The standard timber we supply is seasoned European oak. European oak is prone to movement, which does not look out of place in the informal environments for which these products are intended, and is described in detail on page 78. The larger sizes of oak have been air dried for up to ten years, to help reduce this movement. Purpleheart, balau and iroko can also be specified as alternatives. The dimensions quoted are nominal sizes, so the finished articles will be around 10% smaller.

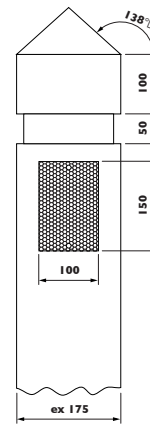


150mm Square Bollards in Oak


Bollards

Standard nominal sizes available					
Length	200 x 200	175 x 175	150 x 150	125 x 125	100 x 100
750mm	•	•	•	•	•
1000mm	•	•	•	•	•
1250mm	•	•	•	•	•
1500mm	•	•	•	•	•


## Standard Profiles Available




**F**  
(Flat)




**C**  
(Chamfered)




**P**  
(Pointed)




**D**  
(Domed)




**FR**  
(Flat & rebated)



**CR**  
(Chamfered & rebated)



**PR**  
(Pointed & rebated)



**DR**  
(Domed & rebated)